


Combination Sill-Thresholds continued


586 A, B

For jambs:
4" to 4-7/8" wide &
continuous level floor.
For doors 1-3/4" and
over. 10 x 2-1/2" phillips
flathead screws
are included.

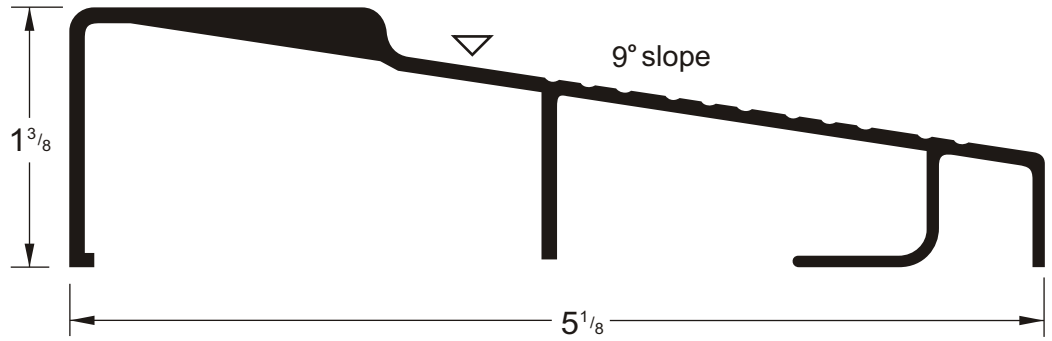


650 A, B

For jambs:
4-3/8" to 5-1/2"
wide. 10 X 2"
phillips flathead
screws are
included.

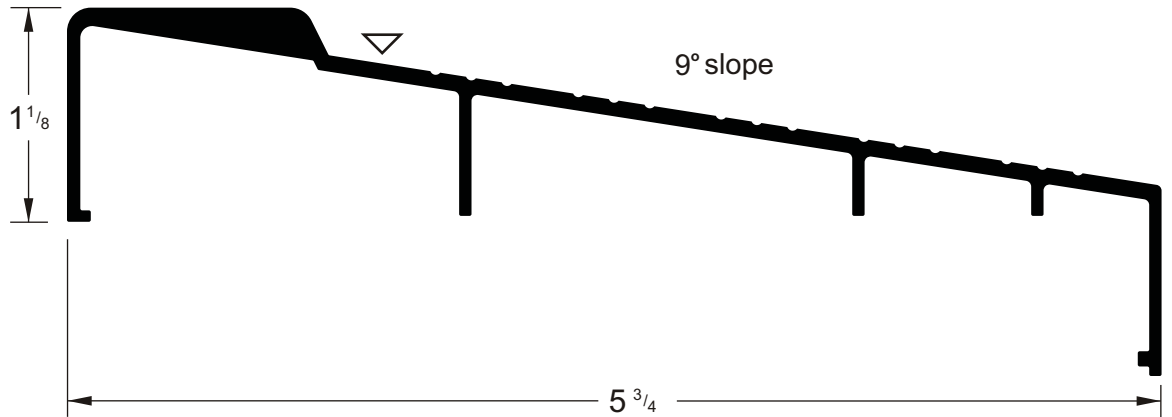


651 A, B

For jambs:
4-3/8" to 5-1/2"
wide & continuous level
floor. 10 X 2"
phillips flathead
screws are included.

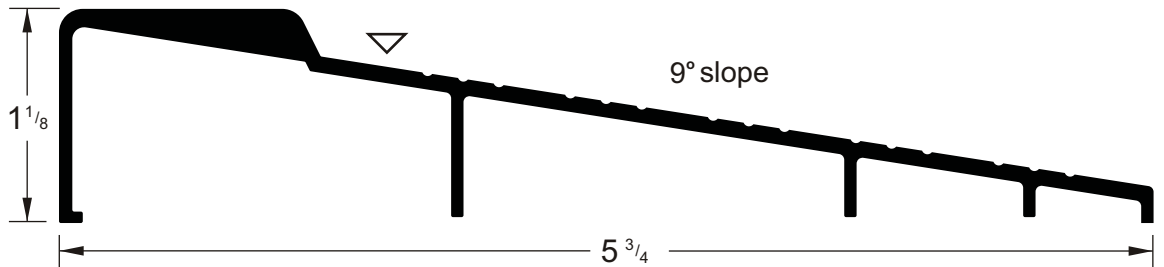

680 A, B

For jambs: 5-1/2" to 6-1/2" wide. 9° slope.
For doors 1-3/4" and over. 10 X 2-1/2" phillips
flathead screws are included.

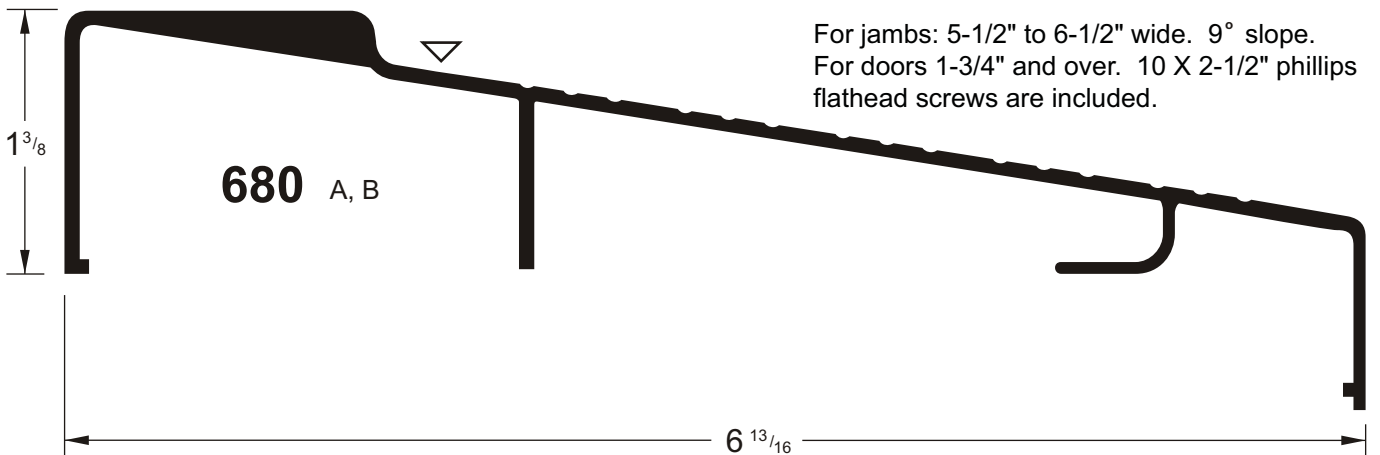

▽ Indicates location of standard fastener hole.