

Section 5 RESIDENTIAL THRESHOLDS

Thresholds are extruded aluminum.

Standard Sizes (Product is cut oversize to allow "cutting in"): 30", 32", 36", 42", 48" (**cut 3/8" over**); 60", 64", 72" (**cut 1" over**).

Other lengths are available and are cut exact. (Extra cost over 73")

Thresholds routed for metal frames are cut exact. Specify special requirements at time of ordering.

Center holes are counter-sunk. #10 phillips flathead screws are included.

Special anchors may be required on concrete slab construction & are available at extra cost, see page 34.

Above specifications do not apply to Hardwood Thresholds and Water Returns, page 18.


Sealing material, both moisture barrier and door seal is made from virgin, flexible extruded vinyl and exceeds requirements specified in commercial standard CS 230-60. Vinyl color is black.

All Combo Thresholds can be packaged with any door bottom to create a packaged set. See pages 3 - 6 for Door Bottom selection.

3007

A, B


Low rug threshold with vinyl moisture barrier. 10 x 1-1/2" phillips flathead screws are included.

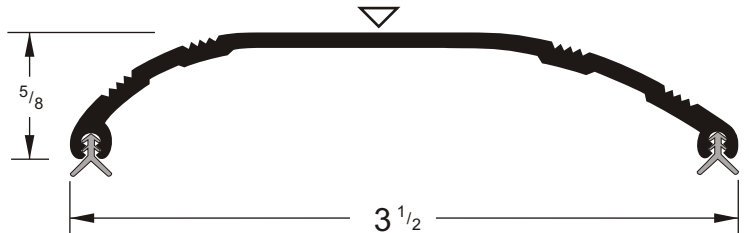

3008

A, B


High rug threshold with vinyl moisture barrier. 10 x 2" phillips flathead screws are included.

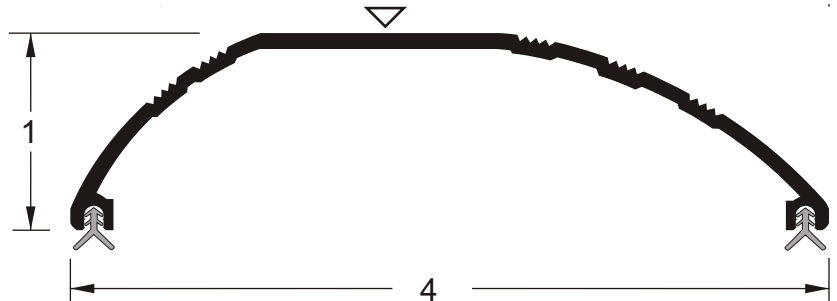

3017

A, B

Extra high rug threshold with vinyl moisture barrier. 10 x 2" phillips flathead screws are included.

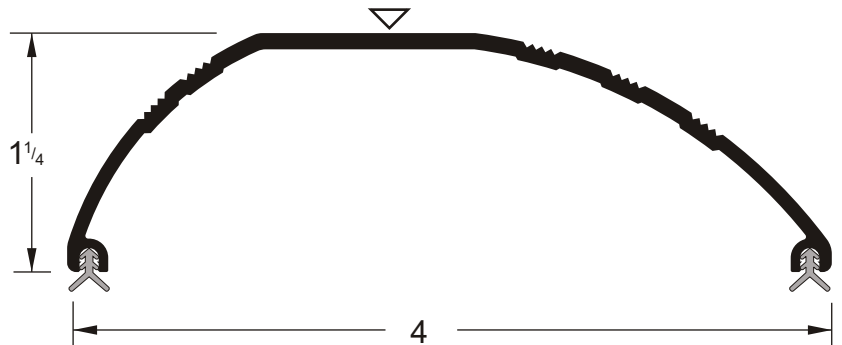

▽ Indicates location of standard fastener hole.