

Section 9 JAMB WEATHERSTRIP

Standard Sizes 30", 32", 36", 60" 72", 80", 84". Aluminum weatherstrip is cut **1/4"** over.

Other lengths are available and cut exact (Extra cost over 84").

Standard Sets: 32" x 80", 36" x 80", 72" x 80", 32" x 84", 36" x 84",

and 72" x 84". Jamb-type weatherstrip may be ordered in three piece sets or individual lengths.

Fasteners holes are slotted for close adjustment in most styles. #6 phillips, stainless steel sheet metal screws are provided with these products.

Self drilling sheet metal screws are available at extra cost.


JAMB-TYPE WEATHERSTRIP

NOTE:

Santoprene® bulb seal (black) is available as an option for vinyl on parts **1000 & 3212**.


Special requirements on the job may call for this advanced seal.

Some problems regarding a sticking reaction between certain paints and vinyl have been eliminated with the use of Santoprene®.

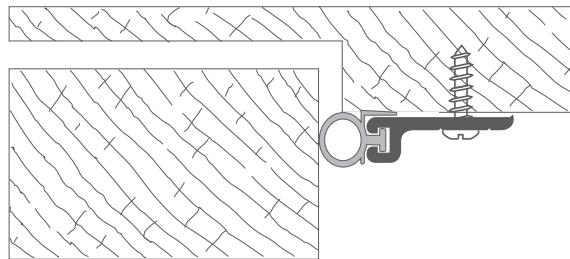


Typical application of jamb type weatherstrip.
(Part #1000 shown.)

1000 A, B, PG, W

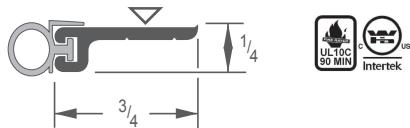

3212 A, B, W

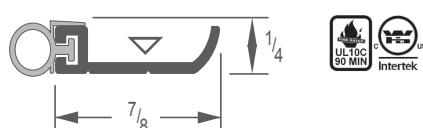

Jamb-type weatherstrip, with black vinyl bulb seal. Slotted holes for ease in adjustment.
#6 X 5/8" SMS provided.

▽ Indicates location of standard fastener hole.

ADHESIVE BACKED DOOR SEAL

1830



SANTOPRENE® RUBBER

500 ft. rolls:

1830D Black
1830W White

17 ft. packages:

1430D Black
1430W White



PRODUCTS ARE SHOWN ACTUAL SIZE
(EXCEPT AS NOTED)

WOODSTOP GASKETING AND SOUND SEALS

Installs into saw kerf in applied wood stops or center kerfed mortised jambs.

9021

Schlegel AP-412
Aptus® TPE
bulb 5/16" dia.
dual durometer with
slipcoat bulb surface.
1000' / roll
Color: Beige
Kerf: 5/64" x 5/16"

9024

Vinyl bulb
1/4" dia.
600' / roll
Colors:
Black and White
Kerf: 1/8" x 5/16"
Color: Gray

9023

Vinyl
three finger
5/16" wide
500' / roll
Color: Gray
Kerf: 1/8" x 5/16".

COMBO ALUMINUM PRODUCTS, EL CAJON, CA
Tel (619) 447-9200 (800) 457-7500 Fax (619) 442-4558


FOAM WEATHERSTRIP

1650

	Box Qty.	
1650B	82"	Brown 125
1650D	82"	Black 125
1650W	82"	White 125
1651B	97"	Brown 125
1651D	97"	Black 125
1651W	97"	White 125
1652B	120"	Brown 125
1656B	250'	RL Brown
1656D	250'	RL Black

Tolerance +/- 1"

(Sold by full box or by piece,
broken box premium applies).



FenSeal DSFC-650K126 FenShield KERF TYPE DOOR SEAL

Certified fire rated for 20 minutes by Intertek Services.

Inserts easily to seal the strike side, hinge side, and header.



Certified to
UL10(c)
NFPA 252
CAN/ULC
S104

FenShield door seal is made of resilient urethane foam core, clad in a durable polyethylene skin, with a structural polypropylene spine.

Has 5/8" reach. Resilient characteristics conform seal to warped doors.
Consistently returns back to its original shape after compression.

Width of barb - .162"


Requires 1/8" x 7/16" kerf in stop. (If rabbeted jamb is used, allow for depth of 2-1/8". If applied stop is used, adjust for compression of seal.)

1687

	Box Qty.	
1687B	97"	Brown 125
1687D	97"	Black 125

Tolerance +/- 1"

(Sold by full box or by piece,
broken box premium applies).



FenSeal DSFC-740K162 FenShield KERF TYPE DOOR SEAL

Certified fire rated for 20 minutes by Intertek Services.

Inserts easily to seal the strike side, hinge side, and header.



Certified to
UL10(c)
NFPA 252
CAN/ULC
S104

FenShield door seal is made of resilient urethane foam core, clad in a durable polyethylene skin, with a structural polypropylene spine.


Has 3/4" reach. Resilient characteristics conform seal to warped doors.
Consistently returns back to its original shape after compression.

Width of barb - .162"

Requires 1/8" x 7/16" kerf in stop. (If rabbeted jamb is used, allow for depth of 2-1/8". If applied stop is used, adjust for compression of seal.)


1825

1825D Black
Corner Seal-
 Adhesive backed,
 pile corner seal
 with fin seal.
 Effective against
 water infiltration.

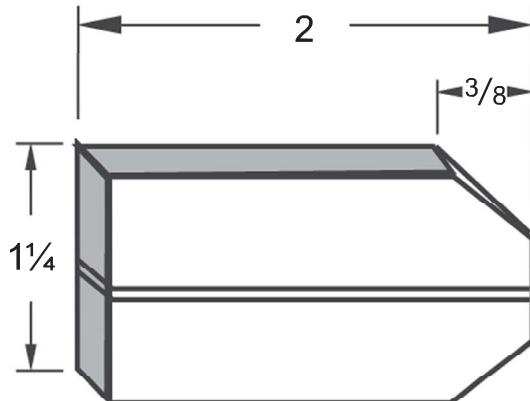

1826 B, W

**Compression
 Corner Seal-**
 For installation on strike jamb
 and hinge jamb sill corners.



1835 B, W


SPECIAL ORDER
ALUMINUM EXTRUSION
JAMB SEAL SET (36" X 84")

Features:

Weatherstrip can be replaced
 without removing holder from the jamb.

Slotted mounting holes allow for
 easy adjustment.


Color-matched mounting screws provided.

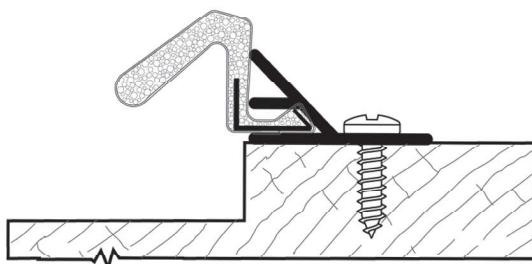

1951

1951B 97" Brown 125
1951W 97" White 125
 Tolerance $\pm 1"$

(Sold by full box or by piece,
 broken box premium applies).



Warnock Hersey


LOXSCREEN 9650 LOXSEAL® HIGH PERFORMANCE WEATHERSTRIP
 Fire rated by Warnock Hersey, Inc. for 90 minutes (per **ASTM E-152**).
 Inserts easily to seal the **strike side, hinge side, and header**.
 LoxSeal® weatherstrip made of polyethylene clad urethane foam.
 Requires $1/8" \times 7/16"$ kerf in stop.
 Passed air infiltration test at 25 mph (per **ASTM E-283**).
 Passed water penetration resistance (per **ASTM E-331**).